


U.S. installation guideline

strada

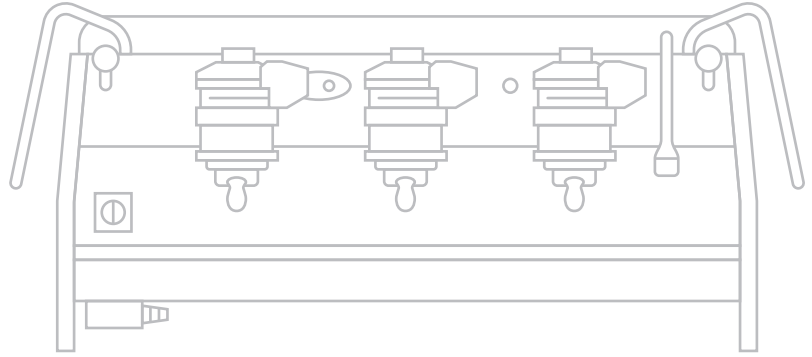

Dimensions

Height
Width
Depth
Working Height°

2 group

19"
32"
27"
12"

3 group

19"
40"
27"
12"

Weights

Shipping Weight
Operating Weight

283 lbs
264.5 lbs

335 lbs
328.4 lbs

Power

Voltage/Phase/Cycle
Wattage
Full Load Amp Draw
Max. Dist. from Outlet*
NEMA Plug and Outlet*

208-240 VAC 1Φ 60Hz
4900
21
5'
6-30P; 6-30R

208-240 VAC 1Φ 60Hz
6400
30
5'
6-50P; 6-50R

Water

Water Flow Rate 2GPM
Dynamic Water Pressure † 45PSI
Min. Pipe Size Diameter* 3/8"
Water Connection* 3/8" male comp.
Water Quality Contact us for a free water test kit. See water specifications.

Drainage

Max. Dist.* 5'
Drain Slope*‡ Min. 1/4" per foot

External Pump§


Dimensions 12" × 12" × 12"
Max. Dist. from Water Supply* 4'
Max. Dist. from Machine 8'
Counter Hole Diameter 2.75"

* suggested | † regulate as needed | ‡ This machine must be installed in accordance with the applicable federal, state and local plumbing codes
° Height from the base of the machine to the group head | § Optional on strada ep when plumbed



la marzocco


handmade in florence

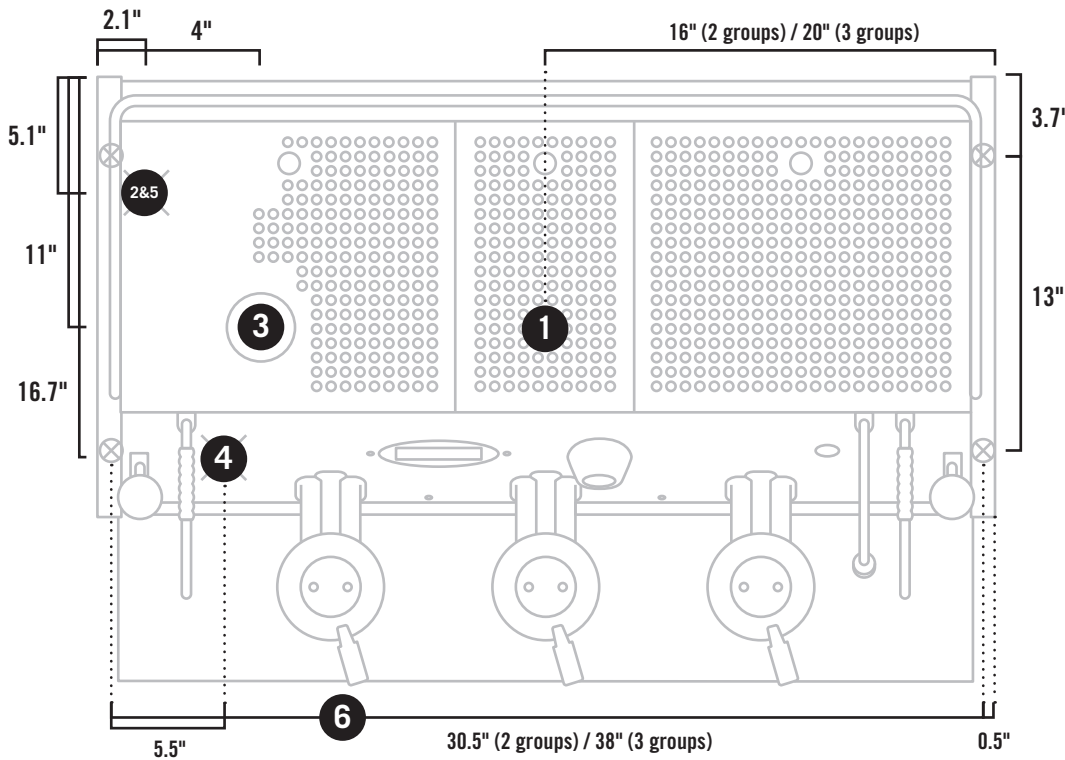

top view

1. center line of the machine
2. position of the power cord
3. suggested diameter of counter hole: 2.75"
4. position of the drain tube
5. position of the water inlet hose
6. width of legs per model

⊗ machine leg location

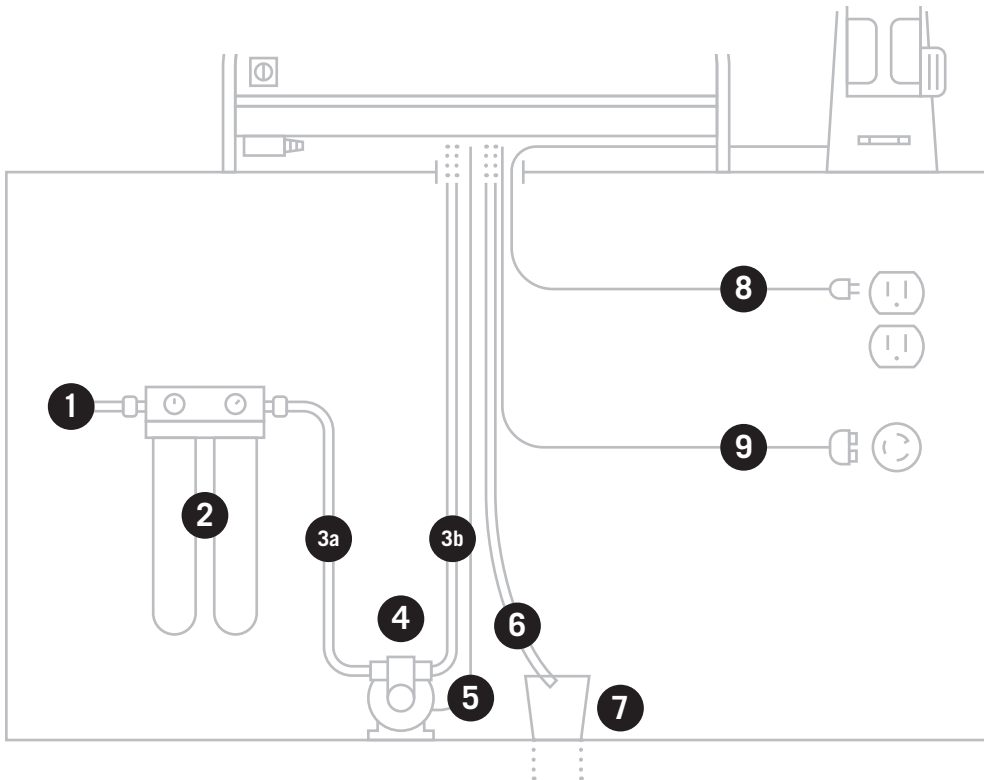

front view

1. 3/8" cold water supply
2. water filter required (not provided), see water specifications below.
- 3a. 3/8" compression cold water supply line suggested max. dist. from water supply 4'
- 3b. 3/8" BSPP cold water supply line suggested max. dist. from water supply 8'
4. pump and motor (MP & EE configurations only)
5. electrical supply to motor from machine
6. 3/4" flexible drainline (min. 0.25"/1' slope)
7. floor drain
8. 110V, 15amp elec. supply to grinder
9. 208-240V single phase elec. supply to espresso machine (plug not provided)

water specifications

La Marzocco recommends that your filtration system produces water with the following properties:

T.D.S.	90—150ppm	pH	6.5—8
Total Hardness	70—100 ppm	Alkalinity	40—80ppm
Total Iron	0—0.02ppm	Chloride	0—30ppm
Free Chlorine	0—0.05ppm	Line Pressure	45—80 PSI
Total Chlorine	0—0.1ppm	Flow Rate	2 GPM or 8 LPM